



More Precision

optoNCDT // Laser displacement sensors (triangulation)






| | |
|--|----------------------------------------------------------------------|
| | Compact design with integrated controller |
| | Measuring rate up to 7.5 kHz |
| | Analog and digital output |
| | Trigger input/teach-in/zero-setting/mastering/synchronization |
| | Configuration via web interface or Plug & Play |
| | Application-specific presets and individual sensor settings |
| | Real Time Surface Compensation |

The optoNCDT 1750 is a powerful laser triangulation sensor which is used in high speed, precise measurements in industrial applications. New evaluation algorithms and enhanced components provide highest accuracy and dynamics. The high-performance optical system generates a small light spot onto the target which enables to even detect smallest components reliably. Due to its extremely compact size, the sensor can also be integrated into restricted installation spaces.


The optoNCDT 1750 laser stands out due to its real-time surface compensation feature. The real-time surface compensation feature (RTSC) determines the amount of reflection from the target surface during continuous exposure and in real-time. The exposure time or the amount of light produced by the laser is optimally matched to the reflection characteristics of the target surface. This enables extremely reliable measurements even on reflecting surfaces.

Different output signals enable to integrate the sensor into plant or machine control systems. As well as analog voltage and current outputs, a digital RS422 interface provides distance information from the sensor. All optoNCDT 1750 models are operated using an intuitive web interface. Due to the selectable setting and evaluation possibilities, the optoNCDT 1750 meets the requirements for use in industrial applications with high dynamics.

optoNCDT 1750 (2/10/20/50/100/200 mm)

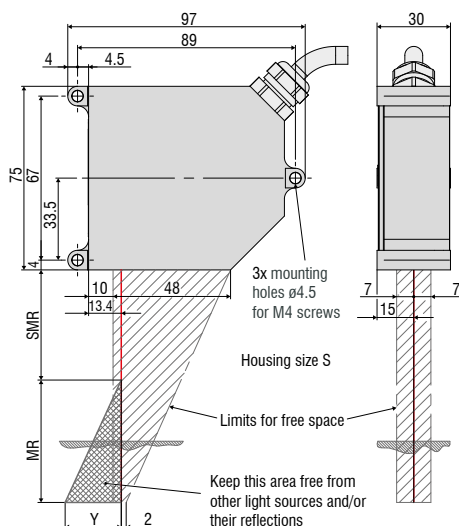


optoNCDT 1750 (500/750 mm)

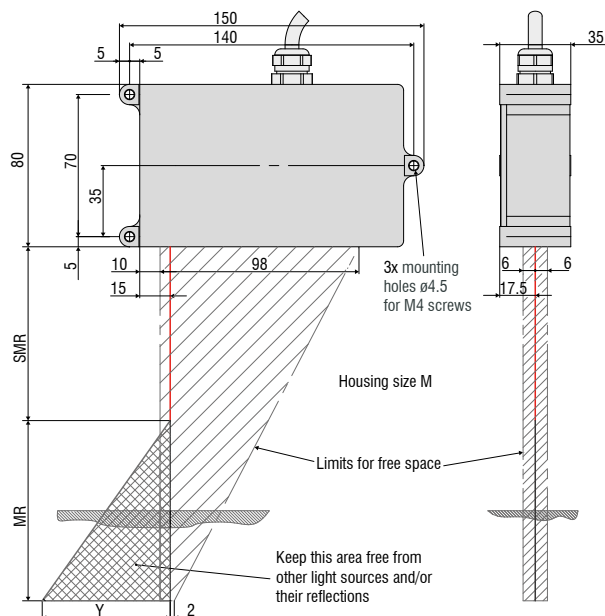


| MR | SMR | Y |
|-----|-----|-----|
| 2 | 24 | 2 |
| 10 | 30 | 7 |
| 20 | 40 | 12 |
| 50 | 45 | 25 |
| 100 | 70 | 35 |
| 200 | 70 | 70 |
| 500 | 200 | 180 |
| 750 | 200 | 270 |

Connector (sensor side)



Connector (sensor cable)



| Model | | ILD1750-2 | ILD1750-10 | ILD1750-20 | ILD1750-50 | ILD1750-100 | ILD1750-200 | ILD1750-500 | ILD1750-750 |
|---------------------------------------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------|------------|-------------|----------------|----------------|----------------|
| Measuring range | | 2 mm | 10 mm | 20 mm | 50 mm | 100 mm | 200 mm | 500 mm | 750 mm |
| Start of measuring range | | 24 mm | 30 mm | 40 mm | 45 mm | 70 mm | 70 mm | 200 mm | 200 mm |
| Midrange | | 25 mm | 35 mm | 50 mm | 70 mm | 120 mm | 170 mm | 450 mm | 575 mm |
| End of measuring range | | 26 mm | 40 mm | 60 mm | 95 mm | 170 mm | 270 mm | 700 mm | 950 mm |
| Linearity | | ≤ ± 1.6 μm | ≤ ± 6 μm | ≤ ± 12 μm | ≤ ± 30 μm | ≤ ± 60 μm | ≤ ± 160 μm | ≤ ± 350 μm | ≤ ± 670 μm |
| | | ≤ ± 0.08 % FSO | ≤ ± 0.06 % FSO | | | | ≤ ± 0.08 % FSO | ≤ ± 0.07 % FSO | ≤ ± 0.09 % FSO |
| Repeatability ²⁾ | | 0.1 μm | 0.4 μm | 0.8 μm | 2 μm | 4 μm | 8 μm | 20 μm | 30 μm |
| Measuring rate | | continuously adjustable 0.3 ... 7.5 kHz | | | | | | | |
| | | 6 adjustable stages: 7.5 kHz / 5 kHz / 2.5 kHz / 1.25 kHz / 625 Hz / 300 Hz | | | | | | | |
| Light source | | semiconductor laser <1 mW, 670 nm (red) | | | | | | | |
| Permissible ambient light (with 2.5 kHz) | | 10,000 lx | | | | | | | |
| Laser safety class | | Class 2 in accordance with DIN EN 60825-1 : 2015-07 | | | | | | | |
| Spot diameter | SMR | 80 μm | 110 μm | 320 μm | 570 μm | 740 μm | 1300 μm | 1500 μm | |
| | MMR | 35 μm | 50 μm | 45 μm | 55 μm | 60 μm | 1300 μm | 1500 μm | |
| | EMR | 80 μm | 110 μm | 320 μm | 570 μm | 700 μm | 1300 μm | 1500 μm | |
| Temperature stability ¹⁾ | | 0.025 % FSO/°C | 0.01 % FSO/°C | | | | | | |
| Operating temperature | | 0 ... +50 °C | | | | | | | |
| Storage temperature | | -20 ... +70 °C | | | | | | | |
| Control inputs/outputs | | 1x HTL/TTL Laser on/off; 1x HTL/TTL multifunction input Trigger in / slave in / zero setting / mastering / teach 2x error outputs (error & limit value): npn, pnp, push pull) 1x RS422 synchronization input (trigger in, sync in, master/slave, master/slave alternating) | | | | | | | |
| Measurement value output | analog | 4 ... 20 mA; 0 ... 5 V / 0 ... 10 V; 16 bit; freely scalable within the measuring range | | | | | | | |
| | digital | RS422 / 18 bit | | | | | | | |
| Operation | button | select & function buttons for interface selections, mastering (zero), teach, presets, quality slider, frequency selection, factory settings | | | | | | | |
| | web interface | application-specific presets; peak selection, video signal; freely selectable averaging possibilities; data reduction; setup management ²⁾ | | | | | | | |
| Supply voltage | | 11 ... 30 VDC | | | | | | | |
| Power consumption | | < 3 W (24 V) | | | | | | | |
| Sensor cable | standard | 0.25 m pigtail with 14-pole ODU connector | | | | | | | |
| | option | Extension: 3 / 10 m | | | | | | | |
| Synchronization | | possible for simultaneous or alternating measurements | | | | | | | |
| Protection class | | IP65 | | | | | | | |
| Vibration | | 2g / 20 ... 500 Hz | | | | | | | |
| Shock | | 15 g / 6 ms | | | | | | | |
| Weight (with 25 cm cable) | | approx. 550 g | | | | | | 600 g | |

FSO = Full Scale Output; The specified data apply to a white, diffuse reflecting surface (reference: ceramics)

¹⁾ based on digital output

²⁾ Connection to PC via IF2001/USB (optionally available)

SMR = start of measuring range; MMR = midrange; EMR = end of measuring range

Accessories for all optoNCDT Series**Power supply**

- PS 2020 (power supply 24 V / 2.5 A, input 100 - 240 V AC, output 24 VDC / 2.5 A, mounting onto symmetrical standard rail 35 mm x 7.5 mm, DIN 50022)

Controller unit for evaluation and signal conversion

- C-Box/2A (controller for conversion and evaluation of up to 2 sensor signals)

Interface card

- IF2008 (interface card for multiple signal processing; analog and digital interfaces)

USB converter

- IF2001/USB RS422/USB converter
(converter for digital signals in USB)

USB converter

- IF2004/USB 4-channel RS422/USB converter
(converter for up to 4 digital signals in USB)

Accessories for optoNCDT 1320 / 1420 / 1402CL1**Supply and output cable (drag-chain suitable)**

- PCF1420-1/I (1 m, output 4...20 mA)
- PCF1420-1/I(01) (1 m, output 4...20 mA)
- PCF1420-3/I (3 m, output 4...20 mA)
- PCF1420-6/I (6 m, output 4...20 mA)
- PCF1420-10/I (10 m, output 4...20 mA)
- PCF1420-15/I (15 m, output 4...20 mA)
- PCF1420-3/U (3 m, with integrated resistor, output 1...5 VDC)*
- PCF1420-6/U (6 m, with integrated resistor, output 1...5 V DC)*
- PCF1420-10/U (10 m, with integrated resistor, output 1...5 VDC)*
- PCF1420-15/U (15 m, with integrated resistor, output 1...5 VDC)*
- PCF1420-3/IF2008 (3 m, interface and supply cable)
- PC1420-6/IF2008 (6 m, supply and output cable)
- PCF1420-10/IF2008 (10 m, interface and supply cable)

* on request with output 2...10 VDC

Supply and output cable, suitable for use with robots

(available in 90° version)

- PCR 1402-3/I (3 m)
- PCR 1402-6/I (6 m)
- PCR 1402-8/I (8 m)

Accessories for optoNCDT 1610 / 1630**Supply and output cable**

- PC 1605-3 (3 m)
- PC 1605-6 (6 m)
- PC 1607-5/BNC (5 m, BNC connector)

Accessories for optoNCDT 1750 / 1750LL / 1700BL**Supply and output cable (drag-chain suitable)**

- PC 1700-3 (3 m)
- PC 1700-10 (10 m)
- PC 1700-10/IF2008 (10 m, for use with interface card IF2008)
- PC 1700-3/T (3 m, for use with trigger box)
- PC 1700-10/T (10 m, for use with trigger box)
- PC 1700-3/USB (3 m, with USB-RS422-converter, power supply 90 ... 230 V AC)

Supply and output cable (suitable for use with robots)

- PCR 1700-5 (5 m)
- PCR 1700-10 (10 m)

Supply and output cables for temperatures up to 200 °C

- PC1700-3/OE/HT (3 m)
- PC1700-6/OE/HT (6 m)
- PC1700-15/OE/HT (15 m)

Protection housing

- SGH model (sizes S and M)
- SGHF model (sizes S and M)
- SGHF-HT model

Accessories for optoNCDT 2300 / 2300LL / 2300BL**Supply and output cable**


- PC2300-0,5Y (connection cable to PC or PLC; for operation a PC2300-3/SUB-D will be required)
 - PC2300-3/SUB-D (3 m; for operation a PC2300-0,5Y will be required)
 - PC 2300-3/IF2008 (interface and supply cable)
 - PC 2300-3/OE (3 m)
 - PC 2300-6/OE (6 m)
 - PC 2300-9/OE (9 m)
 - PC 2300-15/OE (15 m)
- * other cable lengths on request

Protection housing

- SGH model (sizes S and M)
- SGHF model (sizes S and M)
- SGHF-HT model

Supply and output cables for temperatures up to 200 °C

- PC2300-3/OE/HT (3 m)
- PC2300-6/OE/HT (6 m)
- PC2300-9/OE/HT (9 m)
- PC2300-15/OE/HT (15 m)

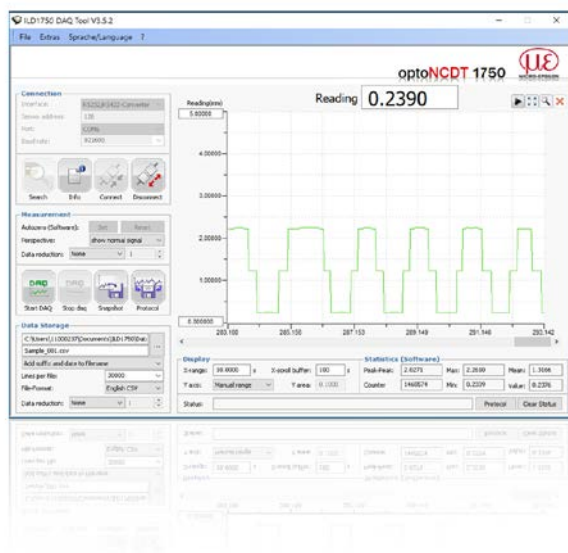

optoNCDT Demo Tool

The scope of supply includes a software for easy sensor configuration. The settings can be implemented conveniently via a Windows user interface on the PC. The sensor parameters are sent to the sensor via the serial port and can also be saved if required. The software is available as single and multi-channel version. The sensor is connected to the PC via the sensor cable using a USB converter.

[for any ILD sensor]

Free download

Download free of charge from www.micro-epsilon.com/download: software, driver and well-documented driver DLL for easy sensor integration in existing or customer software.

Protection housing for harsh environment

To protect the laser sensors in extreme environments, individual protective housings are available for all sensor models. There are three different models:

SGH model:

Completely enclosed housing with an integrated front window, where the sensor measures through the window. The water-resistant housing provides protection against solvents and detergents.

SGHF model:

With window and compressed-air connection ideal for high ambient temperatures. The integrated air cooling of the housing offers optimum protection for the sensor.

SGHF-HT model

This water-cooled protection housing with window and compressed-air connection is designed for measurement tasks in ambient temperatures up to 200 °C.

Suitable for all long-range sensors

optoNCDT 1710

optoNCDT 1750-500 and optoNCDT 1750-750

optoNCDT 2310

optoNCDT 2300-200

Maximum ambient temperature 200 °C

Maximum cooling water temperature $T_{\text{max}} = 10\text{ °C}$

Minimum water flow rate $Q_{\text{min}} = 3\text{ liters/min}$



SGHx ILD size S (140 x 140 x 71 mm)

for optoNCDT 1750 / 2300 dimensions 97 x 75 mm

SGHx ILD size M (140 x 180 x 71 mm)

for optoNCDT 1750 / 2300 dimensions 150 x 80 mm




IF2008 - PCI interface card

The IF2008 interface card is designed for installation in PCs and enables the synchronous capture of four digital sensor signals and two encoders. The IF2008E expansion board enables the acquisition of two digital sensor signals, two analog sensor signals and eight I/O signals. The absolutely synchronous data acquisition plays an important role particularly for planarity or thickness measurement tasks. The data are stored in a FIFO memory in order to enable resource-saving processing in the PC in blocks.

Special features

- 4x digital signals and 2x encoders with IF2008 basic PCB
- 2x digital signals, 2x analog signals and 8x I/O signals with IF2008E expansion board
- Additional expansion board for a total of 6x digital signals, 2x encoders, 2x analog signals and 8x I/O signals
- FIFO data memory
- Synchronous data acquisition



IF2001/USB converter RS422 to USB

The RS422/USB converter transforms digital signals from a laser-optical sensor into a USB data packet. The sensor and the converter are connected via the RS422 interface of the converter. Data output is done via USB interface. The converter loops through further signals and features such as laser on/off, switch signals and function output. The connected sensors and the converter can be programmed through software.



IF2004/USB: 4-channel converter from RS422 to USB

The RS422/USB converter is used for transforming digital signals from up to four optical sensors into USB data signals. The converter has four trigger inputs and a trigger output for connecting additional converters. Data is output via an USB interface. The connected sensors and the converter can be programmed through software.

Special features

- 4x digital signals via RS422
- 4x trigger inputs, 1x trigger output
- Synchronous data acquisition
- Data output via USB



C-Box/2A controller for conversion and evaluation of up to two sensor signals

C-Box/2A is used for fast D/A conversion of two digital input signals or for evaluating two digital sensor signals. The controller is compatible with the optoNCDT 2300 laser triangulation sensors. Output of the sensor signals is possible via two configurable analog outputs, Ethernet or USB. Handling of the C-Box/2A and of the connected sensors are performed via web interface. Averaging functions, thickness, diameter, step and inclinations can be calculated. The D/A conversion is executed at 16 Bit and max. 70 kHz.



High performance sensors made by Micro-Epsilon



Sensors and systems for displacement and position



Sensors and measurement devices for non-contact temperature measurement



2D/3D profile sensors (laser scanner)



Optical micrometers, fiber optic sensors and fiber optics



Color recognition sensors, LED analyzers and color inline spectrometer



Measurement and inspection systems